


RObust connection fitting pack.

This fitting pack allows to connect one 3/4" pressure tank and up to three consumer appliances to an Ecosoft RObust reverse osmosis system.

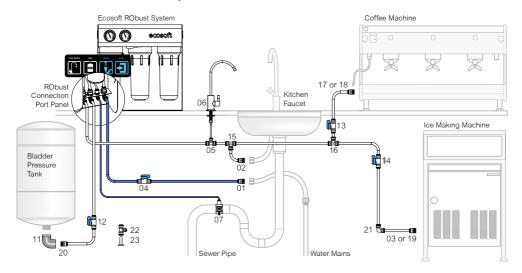

Some of the fittings shown on the diagram come from RObust package. These fittings can be used interchangeably or together with the fittings from RObust connection fitting pack when it's necessary to connect more than one appliance with %" or ½" female thread ports or a ¾" pressure tank. If any of your appliances have different thread sizes, use a suitable adapter for connecting it.

Parts included in the Robust connection fitting pack

# on Diagram	<u>Part</u>	Quantity
11	3/4" female — 3/6" female threaded PVC elbow	1 pc
12, 13, 14	%" tube valve	3 pcs
15, 16	%" tube tee	2 pcs
17	1/2" male — 3/4" tube adapter	1 pc
18, 19, 20	%" male — %" tube adapter	3 pcs
21	%" tube elbow (optional—use if necessary to avoid a steep bend)	1 pc
22, 23	%" — $1/4"$ tube reducing tee + $3/6"$ plug (optional—use for $1/4"$ pressure tank connection)	1 pc
	%" flexible tube	10 m

Parts included in the Robust package

# on Diagram	<u>Part</u>	Quantity
01, 02, 03	1/2" male — 3/4" tube adapter	3 pcs
04	%" tube valve	1 pc
05	%'' - 1/4'' tube reducing tee	1 pc
06	Purified water faucet	1 pc
07	Drain saddle	1 pc
and	= ¼" flexible tube	various
	%" flexible tube	various